




Valvole a battente sede metallica serie PN6-16
Swing check valves, metal sealing seat, class NP6-16

Art.8

Conform to:
UNI EN1092

Exec.1 – Sede metallica – Metal seat

Exec.2 – Sede di tenuta in gomma
Disc seat ring in rubber

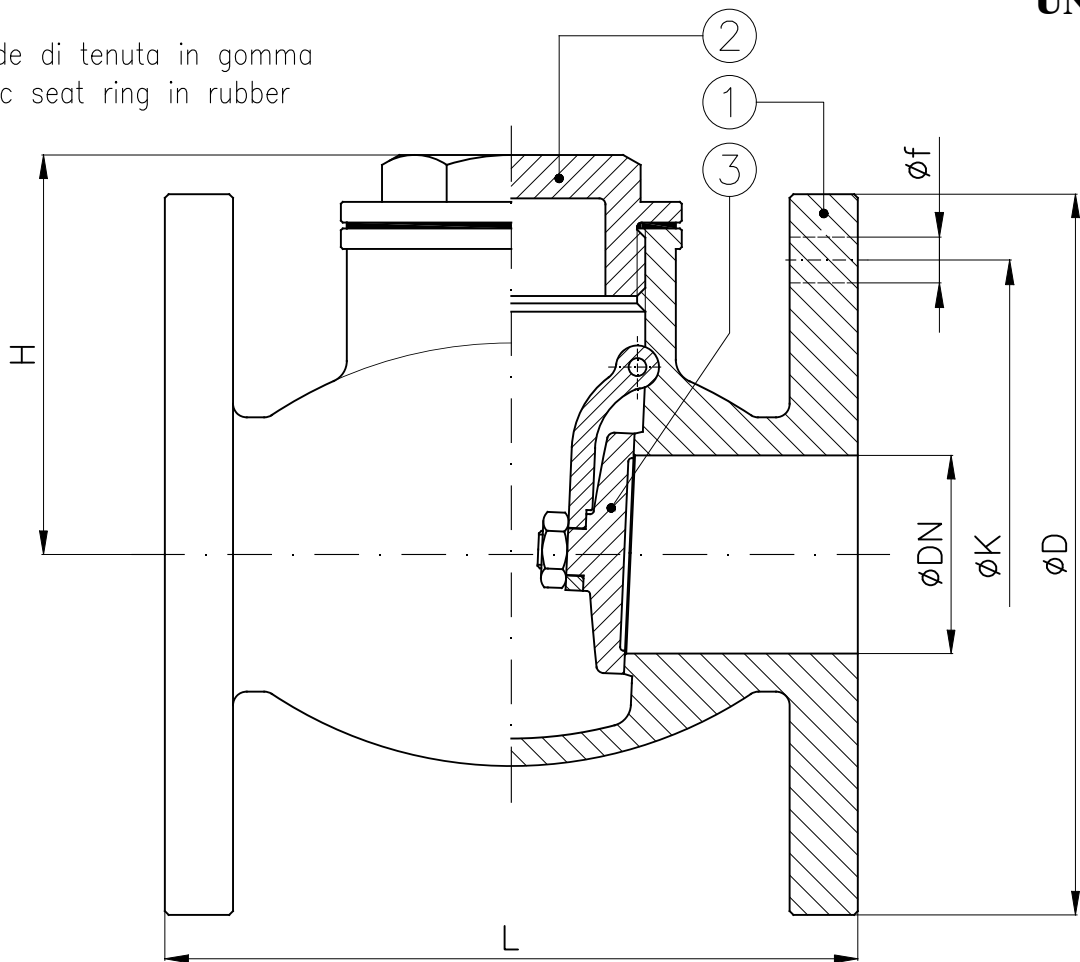

			PN6 – NP6				PN16 – NP16				
DN	H (~)	L	D	K	f	Holes No. f	D	K	f	Holes No. f	Weight (Kg)
15	48	90	80	55	11	4	95	65	14	4	1.5
20	48	90	90	65	11	4	105	75	14	4	1.8
25	52	99	100	75	11	4	115	85	14	4	2.5
32	59	110	120	90	14	4	140	100	18	4	3.7
40	75	130	130	100	14	4	150	110	18	4	4.5
50	83	150	140	110	14	4	165	125	18	4	5.7
65	98	175	160	130	14	4	185	145	18	4	9.4
80	110	180	190	150	18	4	200	160	18	8	10.4
100	112	220	210	170	18	4	220	180	18	8	13

Combinazione materiali standard – Standard materials Combination			
		B/B	B/O
ITEM	DENOMINAZIONE DENOMINATION	MATERIALE MATERIAL	MATERIALE MATERIAL
01	Body	Bronze UNI EN1982 G-CuSn5Zn5Pb5	Bronze UNI EN1982 G-CuSn5Zn5Pb5
02	Bonnet	Brass CW617N (OT58)	Brass CW617N (OT58)
03	Disc ≤ DN50		Brass CW617N (OT58)
03	Disc ≥ DN65	Bronze UNI EN1982 G-CuSn5Zn5Pb5	
Nota: Combinazioni materiali non standard a richiesta Note: Non standard materials combinations on request			