


Valvole a sfera flangiate PN16 con motore elettrico


Ball valves flanged NP16 with electric motor

Art.S2ME/BER

Conform to:
UNI EN1092

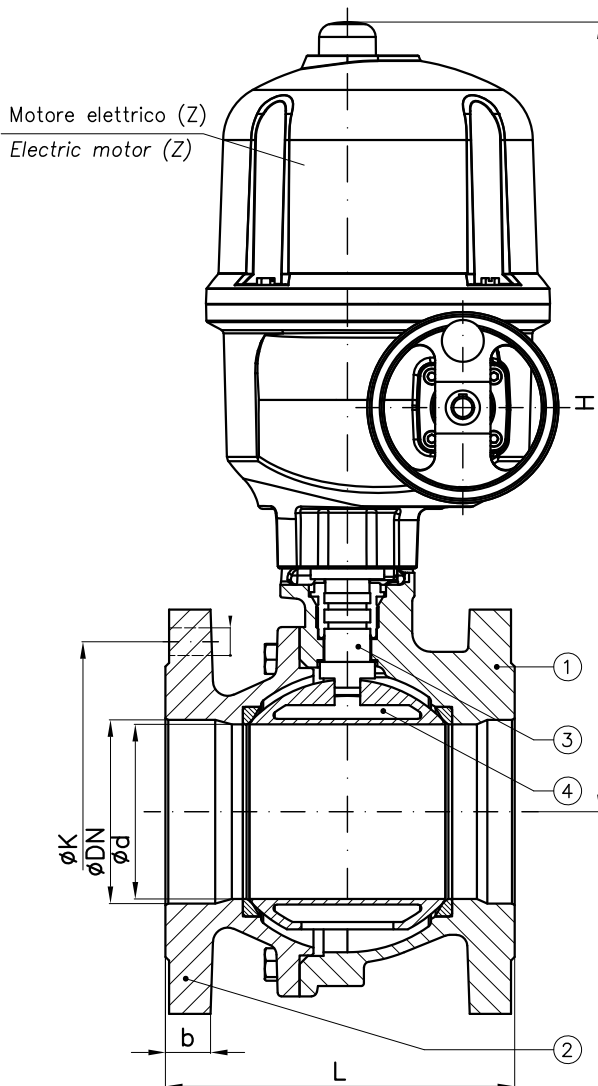


TOP VALVE VIEW
ISO5211



S2.300	B/O
S2.322	B/316
S2.777	BA/BA
S2.722	BA/316
S2.377	B/BA
S2.121	GS/316

	A	B	C	E	ØD1
AQ5/10/15	286	184	276	225	100
AQ30	328	260	427	347	160
AQ50	328	260	427	347	200

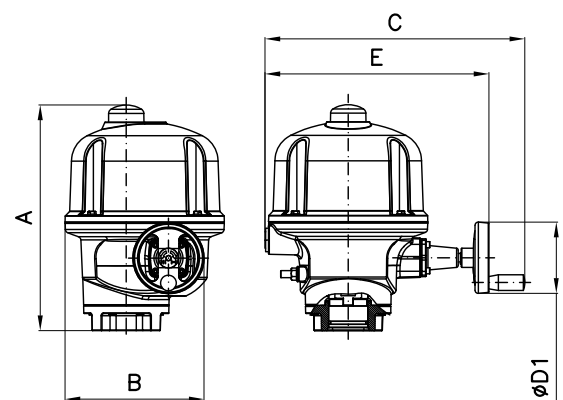

La scelta del motore dipende dalla pressione di esercizio dell'impianto
The choice of the motor depends from plant working pressure

DN	d	b	H ($\sim$)	L	D	K	f	Holes NO. f	C	ISO 5211	K1	f1	Holes NO. f1	Z	Weight (Kg)
15	15	13	337	115	95	65	14	4	9	F04	42	6	4	AQ5	12.5
20	20	13	340	120	105	75	14	4	9	F04	42	6	4	AQ5	13
25	25	15	345	125	115	85	14	4	11	F04	42	6	4	AQ5	15
32	32	16	350	130	140	100	18	4	11	F04	42	6	4	AQ5	16
40	40	19	365	140	150	110	18	4	14	F05	50	7	4	AQ5	19
50	50	19	375	150	165	125	18	4	14	F05	50	7	4	AQ5	21
65	63	23	385	170	185	145	18	4	14	F05	50	7	4	AQ10	26
80	76	24	405	180	200	160	18	8	17	F07	70	9	4	AQ15	31
100	95	24	420	190	220	180	18	8	17	F07	70	9	4	AQ15	38
125	120	24	495	200	250	210	18	8	22	F10	102	11	4	AQ30	56
150	145	24	515	210	285	240	22	8	22	F10	102	11	4	AQ50	67
200	190	28	555	400	340	295	22	12	27	F12	125	13	4	AQ50	114

ESECUZIONE FLANGE ØD : GRADINO (RF) STANDARD – PIANA (FF) A RICHIESTA
FLANGES EXECUTION ØD : STEP (RF) STANDARD – FLAT (FF) ON REQUEST

ESECUZIONE PN6, ANSI150 SU RICHIESTA
EXECUTION NP6, ANSI150 ON REQUEST

		S2.300(FF)–(RF)		S2.322(FF)–(RF)		S2.777(FF)–(RF)		S2.722(FF)–(RF)		S2.377(FF)–(RF)		S2.121 (RF)	
		B/O		B/316		BA/BA		BA/316		B/BA		GS/316	
ITEM	DENOMINAZIONE DENOMINATION	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL	MATERIALE MATERIAL
01	Body	Bronze ASTM B62 C83600	Bronze ASTM B62 C83600	Alu Bronze ASTM B148 C95800	Alu Bronze ASTM B148 C95800	Bronze ASTM B62 C83600	Nodular cast iron EN–GJS–400–15						
02	Lateral	Bronze ASTM B62 C83600	Bronze ASTM B62 C83600	Alu Bronze ASTM B148 C95800	Alu Bronze ASTM B148 C95800	Bronze ASTM B62 C83600	Nodular cast iron EN–GJS–400–15						
03	Stem	Brass CuZn40Pb2	Stainless steel AISI316 UNI EN10088	Alu Bronze CuAl10Ni5Fe4	Stainless steel AISI316 UNI EN10088	Alu Bronze CuAl10Ni5Fe4	Stainless steel AISI316 UNI EN10088						
04	Ball	Brass CuZn40Pb2	Stainless steel AISI316 UNI EN10088	Alu Bronze CuAl10Ni5Fe5 or Alu Bronze ASTM B148 C95800	Stainless steel AISI316 UNI EN10088	Alu Bronze CuAl10Ni5Fe4 or Alu Bronze ASTM B148 C95800	Stainless steel AISI316 UNI EN10088						

		OVERFOLD	ASISTO ON
Nota:	Combinazioni materiali non standard a richiesta		
Note:	Non standard materials combinations on request		

MEDANA&VISCA