




Conform to:
ANSI B16.34
BS 5351 / ISO17292

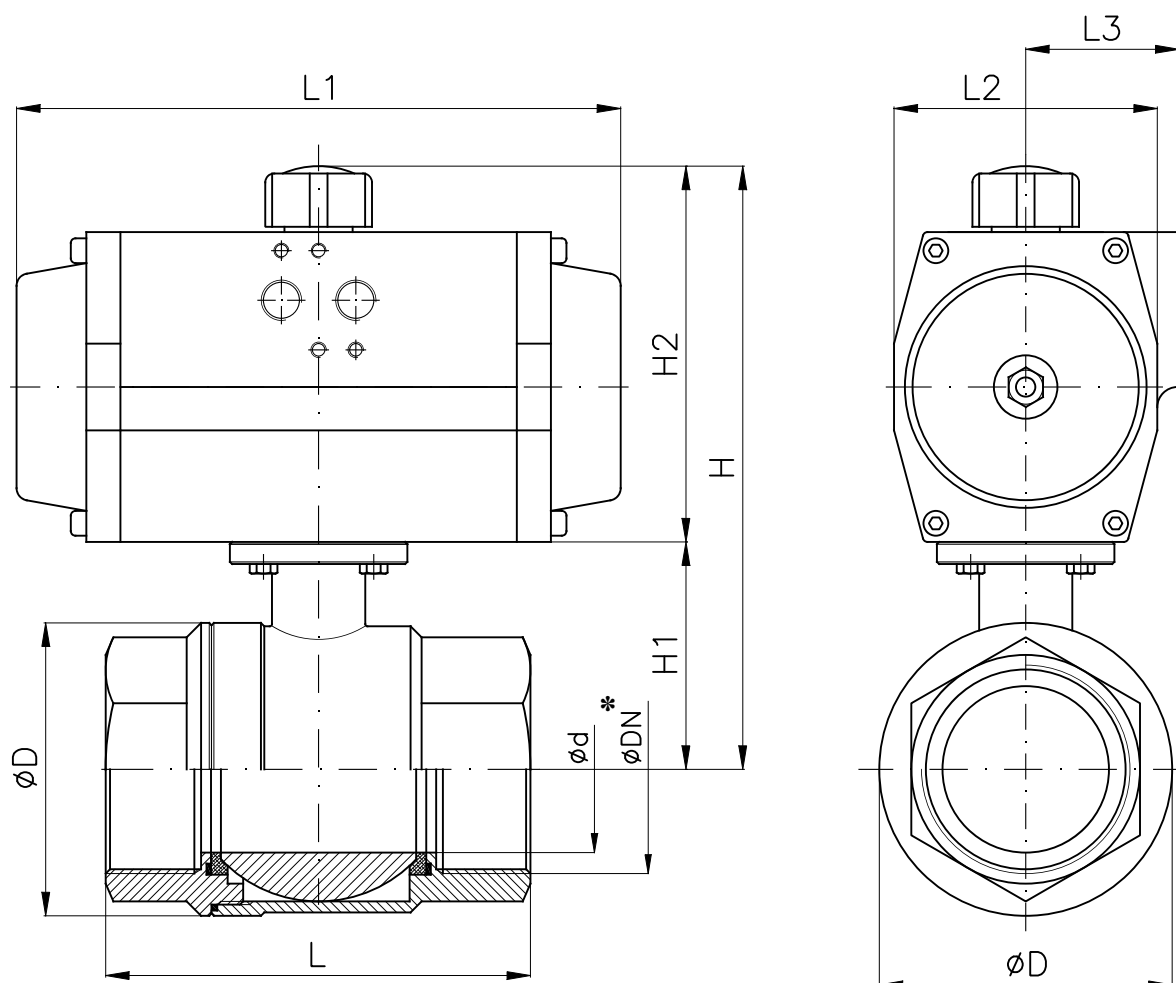

*: Filettatura GAS DA: DOUBLE ACTING
*: BSPP threaded SR: SIMPLE ACTING (Spring Return)

DN		Pneumatic Actuator	D	d	H (~)	H1	H2	L	L1	L2	L3	Weight (Kg)
8	1/4"	AP0 DA	32.4	11	110	36	70	49.6	110	45	28.5	0.9
		AP1 SR			130		92		137	60	41	1.6
10	3/8"	AP0 DA	32.4	12.7	110	36	70	49.6	110	45	28.5	0.9
		AP1 SR			130		92		137	60	41	1.6
15	1/2"	AP1 DA	34.6	15	130	38	92	55	137	60	41	1.6
		AP1 SR			130		92		137	60	41	1.7
20	3/4"	AP1 DA	43.9	20	135	41.7	92	75.5	137	60	41	1.8
		AP2 SR			150		108		150	73	44.5	2.5
25	1"	AP1 DA	50.3	25	140	44.4	92	82.5	137	60	41	2
		AP2 SR			155		108		150	73	44.5	2.7
32	1"1/4	AP2 DA	62.6	32	165	54	108	90.8	150	73	44.5	3
		AP3 SR			180		125		204	85	49.5	4.8
40	1"1/2	AP2 DA	74.1	40	170	59.5	108	103	150	73	44.5	3.6
		AP3 SR			185		125		204	85	49.5	5.3
50	2"	AP3 DA	89.1	50	195	67	125	120	204	85	49.5	5.7
		AP3.5 SR			205		135		230	98	53	7.8
65	2"1/2	AP3.5 DA	116.7	65	240	101.5	135	155	230	98	53	11.3
		AP4 SR			255		150		271	110	58	14
80	3"	AP3.5 DA	140.7	80	250	112.5	135	182	230	98	53	14.7
		AP5 SR			305		190		360	140	70	24.5