



Valvole a sfera SPLIT BODY, passaggio totale flangiate PN6-16-40-ANSI150 con motore elettrico

Ball valves SPLIT BODY, full bore flanged NP6-16-40-ANSI150 with electric motor


Tab.200
ME/VAL

Tab 200A-ME/VAL: ANSI150



Tab 200B-ME/VAL: PN6-16-40

Conform to:

DIN 3202
ANSI B16.34
ANSI B16.5
UNI EN 1092


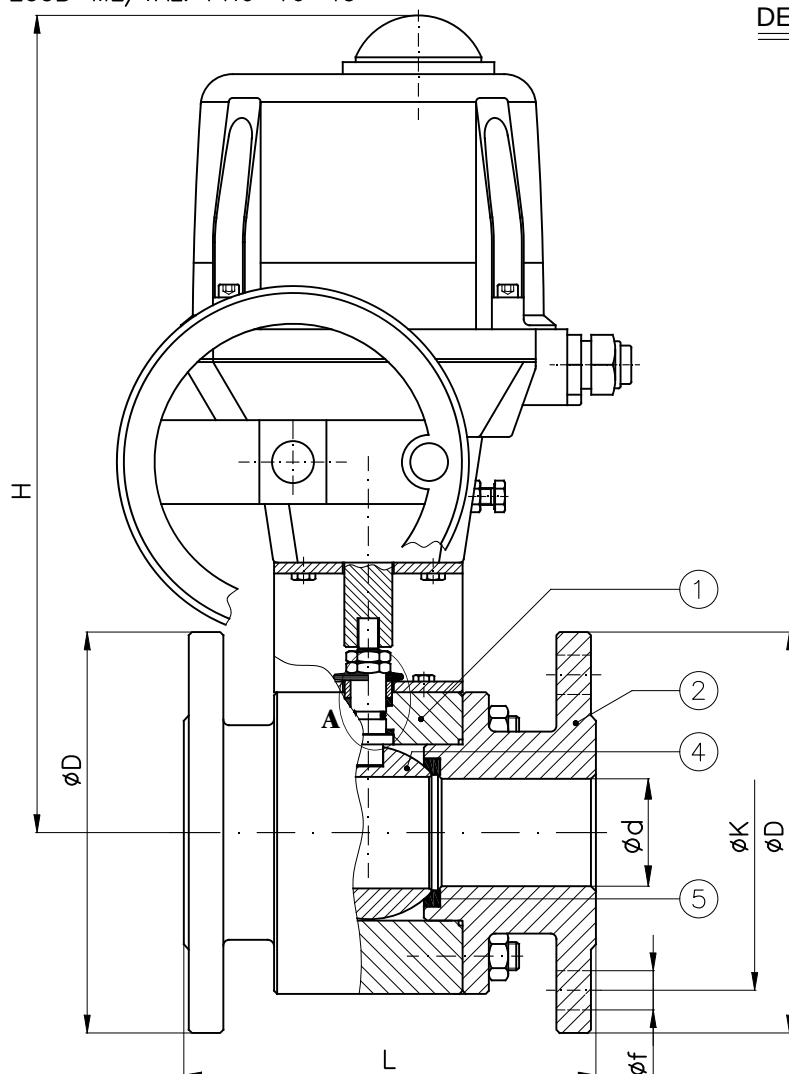


DETAIL - DETTAGLIO "A"

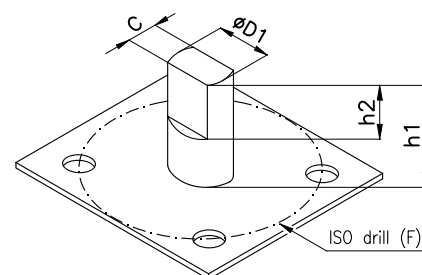

DN	D1xC	h1	h2	ISO—F	
15	1/2"	10x5.5	19	8	F03
20	3/4"	12x7.5	27	9	F04
25	1"	12x7.5	25	10	F04
32	1 1/4	14x9	41	16	F04
40	1 1/2	14x9	41	16	F04
50	2"	14x9	37	15	F05
65	2 1/2	22x14	57	24	F07
80	3"	22x14	60	28	F07
100	4"	30x18	70	26	F07

				Tab. 200B-ME/VAL		Tab. 200A-ME/VAL		PN6 – NP6				PN16 – NP16				PN40-NP40				ANSI150				
DN	Electric motor	d	H (-)	L PN6-16-40	Weight (Kg)	L ANSI150	Weight (Kg)	D	K	f	Holes No. f	D	K	f	Holes No. f	D	K	f	Holes No. f	D	K	f	Holes No. f	
15	1/2"	VR25	14	295	115	6.5	108	6	80	55	11	4	95	65	14	4	95	65	14	4	88.9	60	16	4
20	3/4"	VR25	19	295	120	7.5	117	7.5	90	65	11	4	105	75	14	4	105	75	14	4	98.4	70	16	4
25	1"	VR45	25	305	125	9.5	127	9.5	100	75	11	4	115	85	14	4	115	85	14	4	108	79	16	4
32	1 1/4"	VR75	32	310	130	10.5	140	11.5	120	90	14	4	140	100	18	4	140	100	18	4	118	89	16	4
40	1 1/2"	VR75	38	315	140	15.5	165	16.5	130	100	14	4	150	110	18	4	150	110	18	4	127	98	16	4
50	2"	VR75	48	325	150	17.5	178	20.5	140	110	14	4	165	125	18	4	165	125	18	4	152	121	19	4
65	2 1/2"	VS150	65	340	170	26.5	190	27.5	160	130	14	4	185	145	18	4	185	145	18	8	178	140	19	4
80	3"	VS150	76	405	180	27.5	203	35.5	190	150	18	4	200	160	18	8	200	160	18	8	190	152	19	4
100	4"	VS300	95	435	190	41.5	229	45.5	210	170	18	4	220	180	18	8	235	190	22	8	229	191	19	8

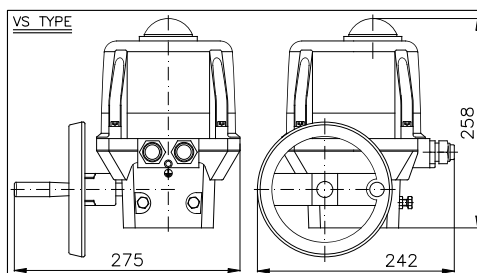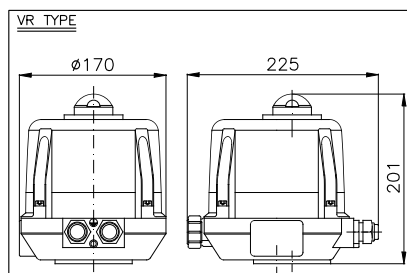

Combinazione materiali standard - Standard materials Combination			
ITEM	DENOMINAZIONE DENOMINATION	A/316 MATERIALE MATERIAL	316/316 MATERIALE MATERIAL
01	Body	Forged steel ASTM A105N	Stainless steel AISI316 UNI EN10088
02	Lateral	Forged steel ASTM A105N	Stainless steel AISI316 UNI EN10088
03	Stem	Stainless steel AISI316 UNI EN10088	Stainless steel AISI316 UNI EN10088
04	Ball	Stainless steel AISI316/304 UNI EN10088	Stainless steel AISI316 UNI EN10088
05	Seat	PTFE/RPTFE	PTFE/RPTFE
06	Nuts	Galvanized Steel 8.8 EN20898-1	Galvanized Steel 8.8 EN20898-1
07	Socket springs	Galvanized Steel	Galvanized Steel
08	Stem seals	RPTFE	RPTFE

Nota: Combinazioni materiali non standard a richiesta
Note: Non standard materials combinations on request

MEDANA&VISCA