






Conform to:

ANSI B16.34

BS 5351 / ISO17292

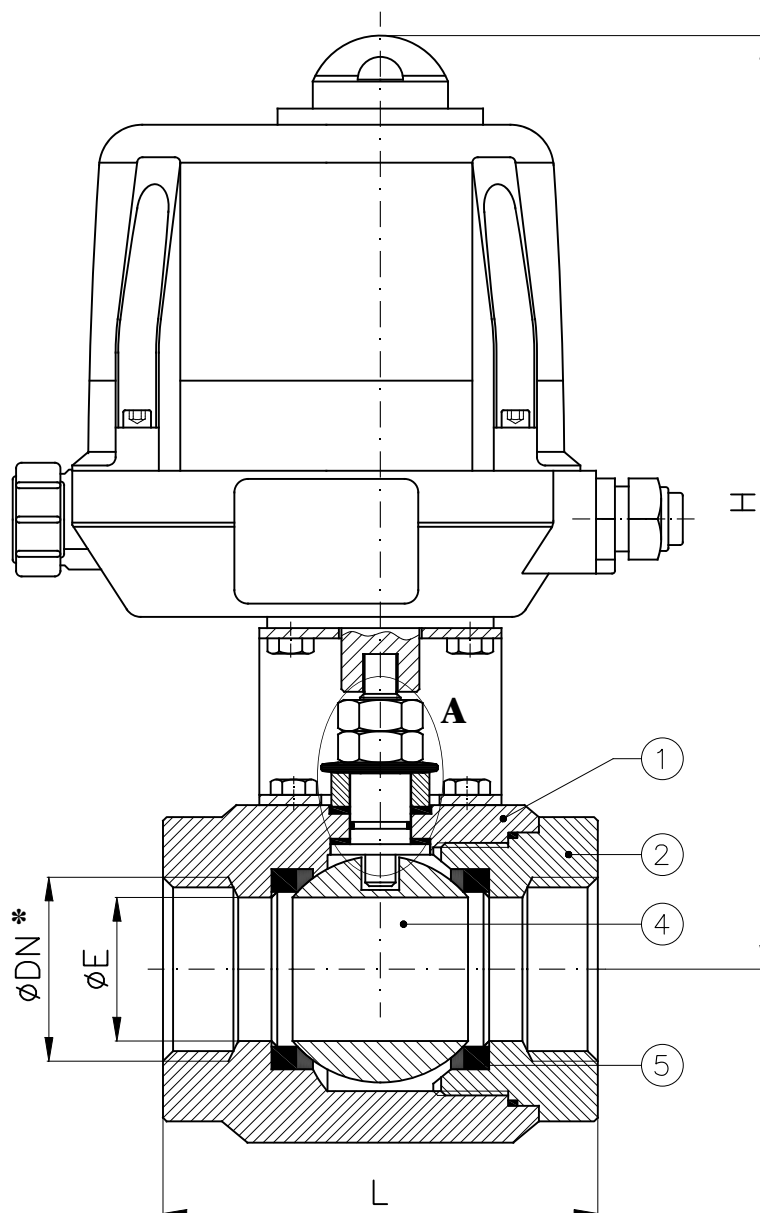

DETAIL - DETTAGLIO "A"

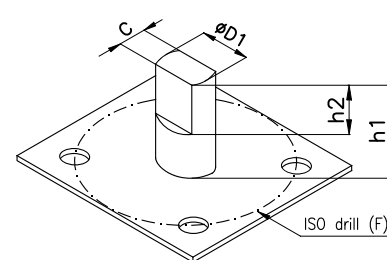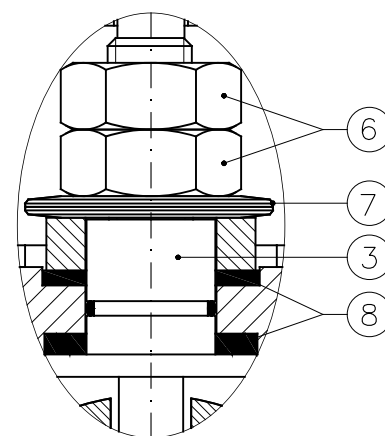


*: Filettatura GAS

*: BSPP threaded

DN		Electric motor	H (~)	L	Weight (Kg)
15	1/2"	VR25	290	75	4.5
20	3/4"	VR25	295	90	5.3
25	1"	VR45	300	100	6.5
32	1 1/4"	VR75	305	115	8
40	1 1/2"	VR75	310	128	8.5
50	2"	VR75	315	147	10

DN		D1xC	h1	h2	ISO—F
15	1/2"	10x5.5	23	10	F03
20	3/4"	12x7.5	29	11	F04
25	1"	12x7.5	28	12	F04
32	1 1/4"	14x9	45	18	F05
40	1 1/2"	14x9	44	19	F05
50	2"	14x9	46	17	F05

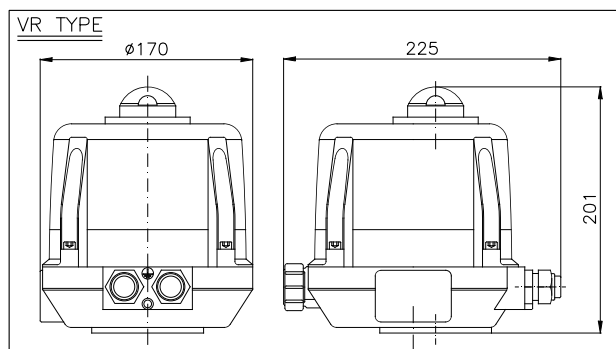

Combinazione materiali standard – Standard materials Combination			
ITEM	DENOMINAZIONE DENOMINATION	A/316 MATERIALE MATERIAL	316/316 MATERIALE MATERIAL
01	Body	Forged steel ASTM A105N	Stainless steel AISI316 UNI EN10088
02	Lateral	Forged steel ASTM A105N	Stainless steel AISI316 UNI EN10088
03	Stem	Stainless steel AISI316 UNI EN10088	Stainless steel AISI316 UNI EN10088
04	Ball	Stainless steel AISI316/304 UNI EN10088	Stainless steel AISI316 UNI EN10088
05	Seat	PTFE/RPTFE	PTFE/RPTFE
06	Nuts	Galvanized Steel 8.8 EN20898-1	Galvanized Steel 8.8 EN20898-1
07	Socket springs	Galvanized Steel	Galvanized Steel
08	Stem seals	RPTFE	RPTFE
Nota: Combinazioni materiali non standard a richiesta Note: Non standard materials combinations on request			