





Conform to:
UNI EN1092
NI584751
NM584772

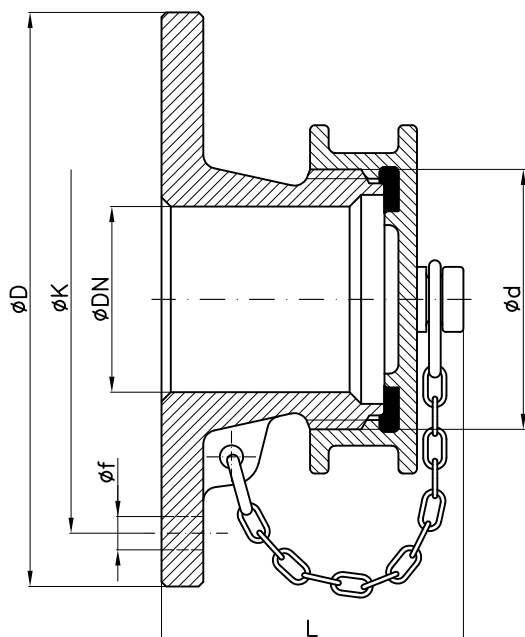

Esecuzione "A"
Execution "A"

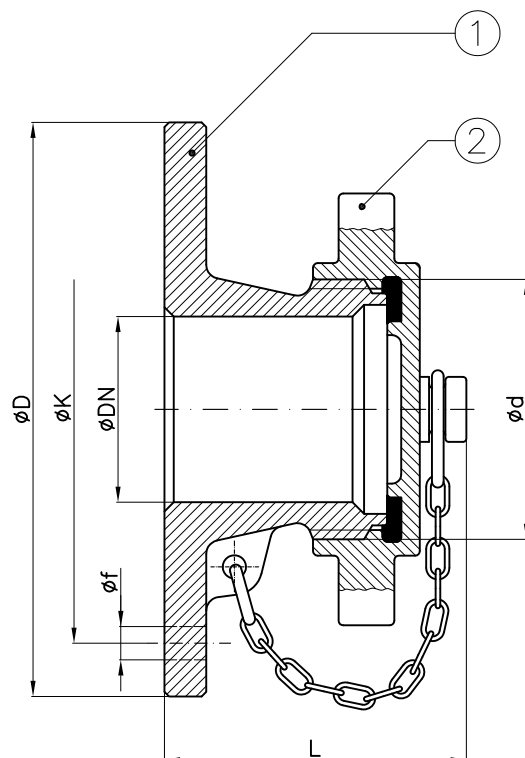

Esecuzione "B"
Execution "B"

DN	Esec.	d	L (~)	Weight (Kg)
25	A	34x3M	65	1.3
40	A	56x4M	65	2
60-65-70	B	85x6M	80	4
80	B	95x6M	85	6
90-100	B	115x6M	95	8
125	B	140x6M	110	12
150	B	165x6M	110	16

PN	DN	Tab. UNI – UNAV
6	25 ÷ 150	UNI 2870 – UNAV 8573
10	25 ÷ 140	UNI 2866 – UNAV 8569
16	25 ÷ 65	UNI 2869 – UNAV 8575
40	25 ÷ 60	UNI 2865 – UNAV 8571

	PN6 – NP6				PN10M.M.I.–NP10M.M.I.				PN16 – NP16				PN40 – NP40			
DN	D	K	f	Holes No. f	D	K	f	Holes No. f	D	K	f	Holes No. f	D	K	f	Holes No. f
25	100	75	11	4	95	70	14	4	115	85	14	4	115	85	14	4
40	130	100	14	4	110	85	14	4	150	110	18	4	150	110	18	4
60	—	—	—	—	135	110	14	6	—	—	—	—	—	—	—	—
65	160	130	14	4	—	—	—	—	185	145	18	4	185	145	18	8
70	—	—	—	—	140	115	14	6	—	—	—	—	—	—	—	—
80	190	150	18	4	155	130	14	8	200	160	18	8	200	160	18	8
90	—	—	—	—	170	145	14	8	—	—	—	—	—	—	—	—
100	210	170	18	4	175	150	14	8	220	180	18	8	235	190	22	8
125	240	200	18	8	200	175	14	12	250	210	18	8	270	220	26	8
150	165	225	18	8	230	205	14	12	285	240	22	8	300	250	26	8

Combinazione materiali standard – Standard materials Combination					
ITEM	DENOMINAZIONE DENOMINATION	A/O MATERIALE MATERIAL	316/O MATERIALE MATERIAL	B/O MATERIALE MATERIAL	GS/O MATERIALE MATERIAL
01	Flange	Cast steel UNI EN10025 S275JR	Stainless steel AISI316 UNI EN10088	Bronze UNI EN1982 G-CuSn5Zn5Pb5	Nodular cast iron EN-GJS-400-15U UNI EN1563
02	Plug	Brass CW617N (OT58)	Brass CW617N (OT58)	Brass CW617N (OT58)	Brass CW617N (OT58)

Nota: Combinazioni materiali non standard a richiesta
Note: Non standard materials combinations on request