



Saracinesche serie ANSI150-300 RF, 800LBS SW-BW
Gate valves type ANSI150-300 RF, 800LBS SW-BW



Tab.199GA

Conform to:
ANSI B16.5

Type
 199 GA-FL

Conform to:
ANSI B16.34

Type
 199 GA

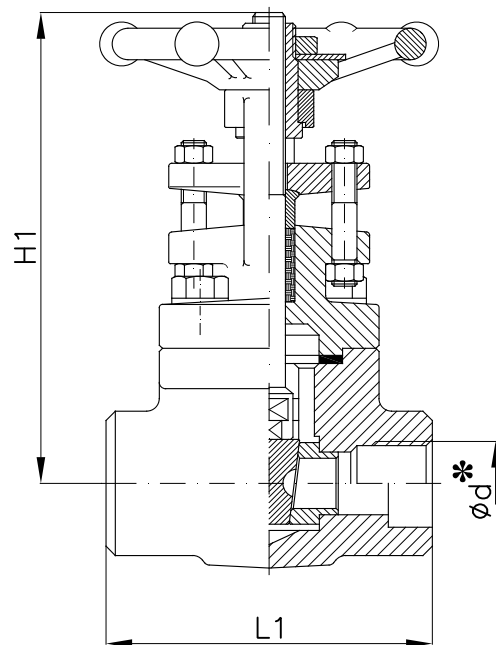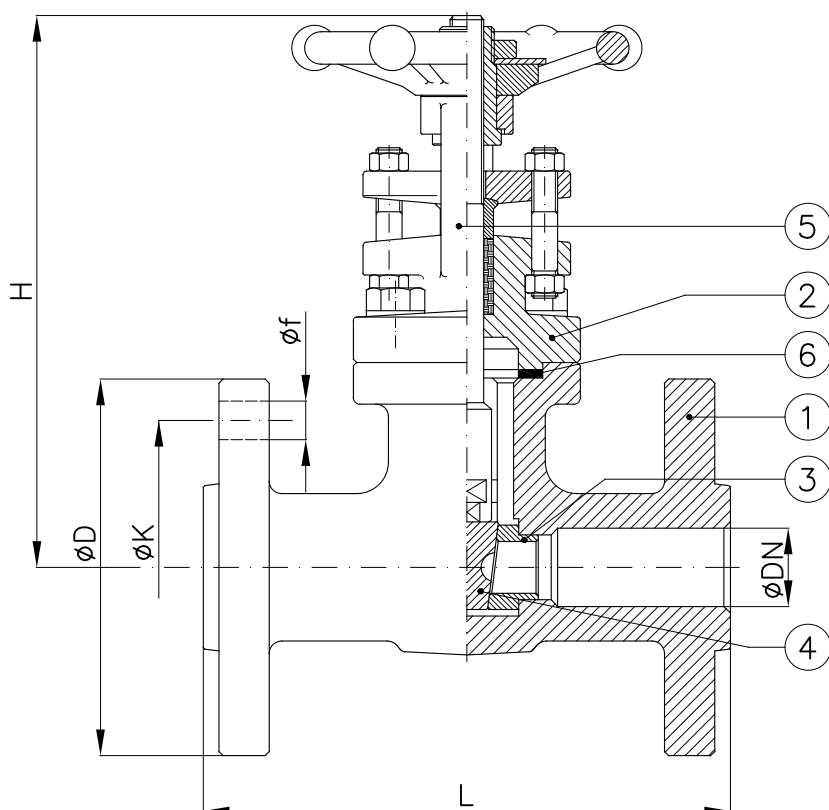

*: Filettatura GAS

*: BSPP threaded

		ANSI150							ANSI300							CLASS 800		
DN	d	H(≈) aperta/open	L	D	K	f	Holes NO. f	Weight (Kg)	H(≈) aperta/open	L	D	K	f	Holes NO. f	Weight (Kg)	H1(≈) aperta/open	L1	Weight (Kg)
15	1/2"	180	108	88.9	60	16	4	3.1	180	140	95	67	16	4	4	145	80	1.8
20	3/4"	185	118	98.4	70	16	4	4	188	153	117	83	19	4	5.4	155	90	2.1
25	1"	210	127	108	79	16	4	5.7	210	165	124	89	19	4	6.5	185	110	3.6
32	1 1/4"	—	—	—	—	—	—	—	—	—	—	—	—	—	—	218	127	5.3
40	1 1/2"	270	165	127	98	16	4	10.6	270	191	156	114	22	4	13	255	127	7.5
50	2"	300	178	152	121	19	4	15.4	312	216	165	127	19	8	17.4	277	130	9.8

Combinazione materiali standard – Standard materials Combination			
		A/420	316/316
ITEM	DENOMINAZIONE DENOMINATION	MATERIALE MATERIAL	MATERIALE MATERIAL
01	Body	Forged steel ASTM A105N	Stainless steel ASTM A182 F316L
02	Bonnet	Forged steel ASTM A105N	Stainless steel ASTM A182 F316L
03	Body seat	Stainless steel A479 TP420	Stainless steel A479 TP316L
04	Disc	Stainless steel A479 TP420	Stainless steel A479 TP316L
05	Stem	Stainless steel A479 TP420	Stainless steel A479 TP316L
06	Gasket	F316 + Graphite	F316 + Graphite
Nota:		Combinazioni materiali non standard a richiesta	
Note:		Non standard materials combinations on request	

MEDANA&VISCA